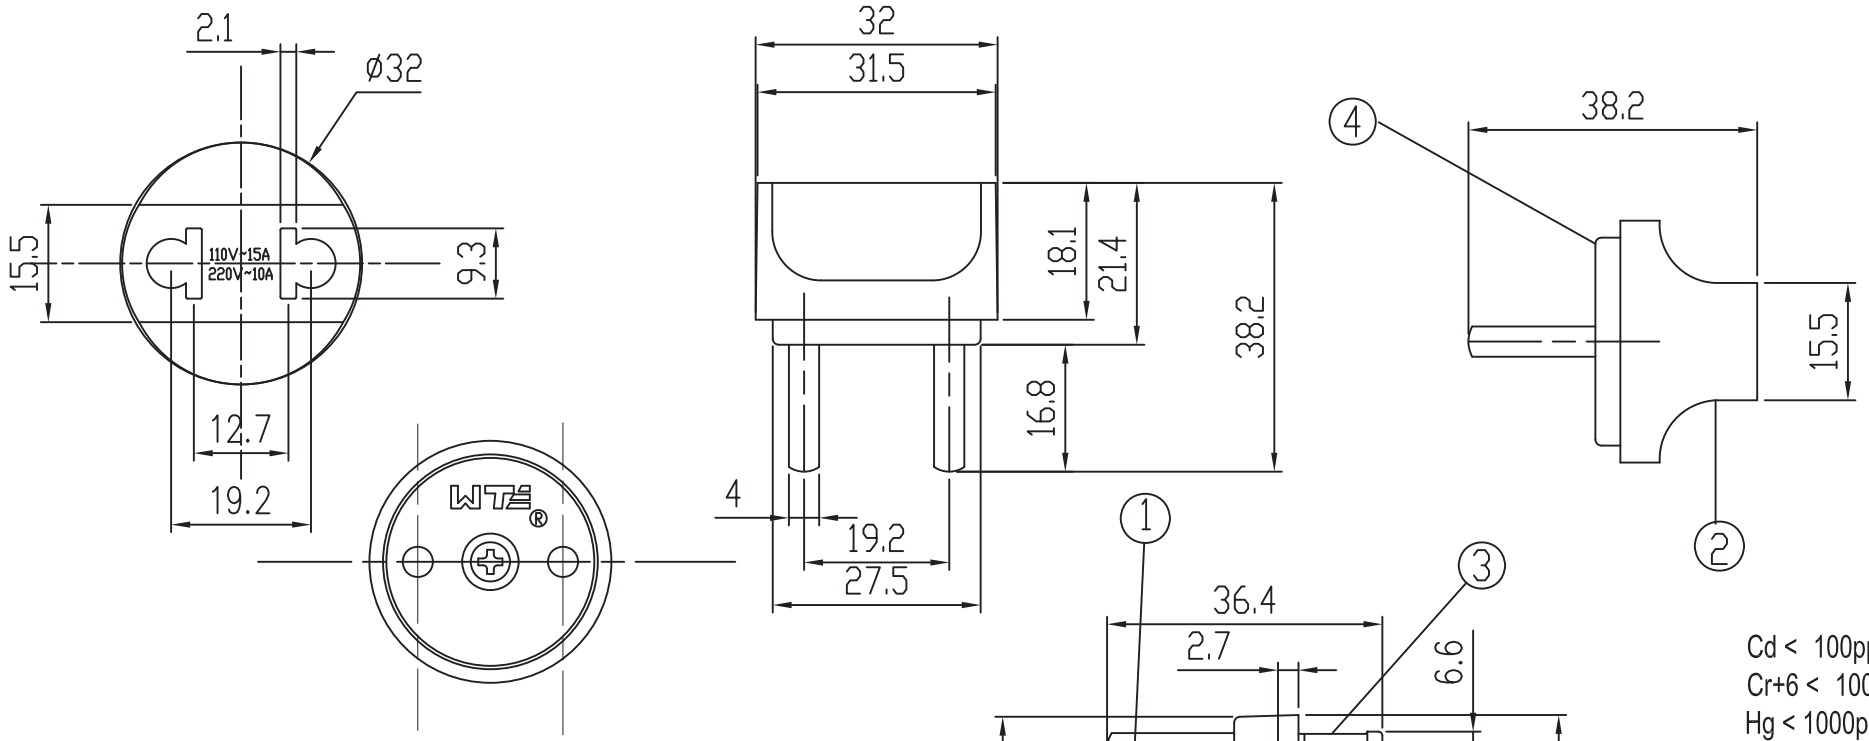


SPECIFICATION
CONTACT RATING: 10A 250VAC
INSULATION RESISTANCE: 500V DC for 1 min.
Dielectric strength: 2000V a.c. for 1 min.
Withstand voltage:AC 500V 60Hz 1 minute

Cd < 100ppm
Cr+6 < 1000ppm
Hg < 1000ppm
Pb < 1,000ppm
銅合金 Pb < 40,000ppm
PBB < 1000ppm
PBDE < 1000ppm

| NO | DESCRIPTION | MATERIAL | QTY | SGS REPORT NO. |
|---|---|---|---|---|
| 1 | PIN | BRONZE, NICKEL(銅合金) | 2 | CE/2005/B2486 |
| 2 | HOUSING | BAKELITE BLACK | 1 | CE/2004/C2264 |
| 3 | GROUND | BAKELITE, BLACK | 1 | CE/2004/C2264 |
| 4 | CONTACT | BRONZE, NICKEL | 2 | KA/2004/80319/A-1 |

| TOLERANCES |
|---|
| 0.5MM-5MM=±0.2MM |
| 5MM-30MM=±0.4MM |
| 30MM-120MM=±0.6MM |
| 120MM-315MM=±1.0MM |
| 315MM-1000MM=±1.6MM |
| 1000MM-2000MM=±2.4MM |

| General Tolerance | 繪圖 Draw By | 設計 Designed By | 比例尺 Scale |
|---|---|---|---|
| | C.T WANG | C.T WANG | 1:1 |
| 版本 Version | 核準 Approved By | 核準日期 Date | 單位 UNIT |
| 2 | C.C HUANG | 17 NOV 2005 | m/m |

大廣有限公司
DA KOANG CO., LTD.

1117
4mm AC ADAPTPR
EUROPEAN 220V TO 110V
125V15A BAKELITE BLACK

REF.NO.