
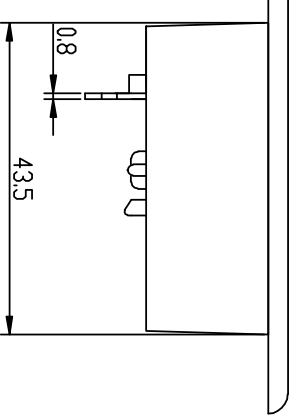


**SPECIFICATIONS:**  
 Rated Load : AC 50V 3A  
 Contact Resistance : 0.03Ω max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Temperature : -40~55°C  
 Withstand Voltage : AC 500V(50Hz)/min  
 Actuating Force : 1kgf  
 Wire Range : AWG #24-#26  
 Life : 5000 Cycles.

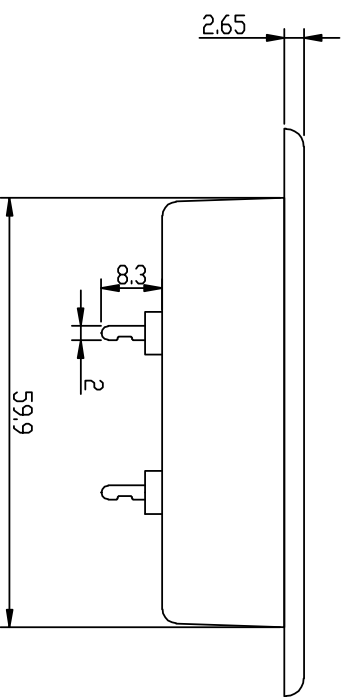

大廣有限公司 DAKOANG CO., LTD.

DATE

12.26.2011

DWN

CHKD

APVD

MANAGFR

PART NAME: 2P PUSH TERMINAL

PART NUMBER: 3102

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:

