Signal Assignment

CN1	CN2	CN1	CN2
1	1	11	11
2	2	12	12
3	3	13	13
4	4	14	14
5	5	15	15
6	6	16	16
7	7	17	17
8	8	18	18
9	9	19	19
10	10	SHELL	SHELL

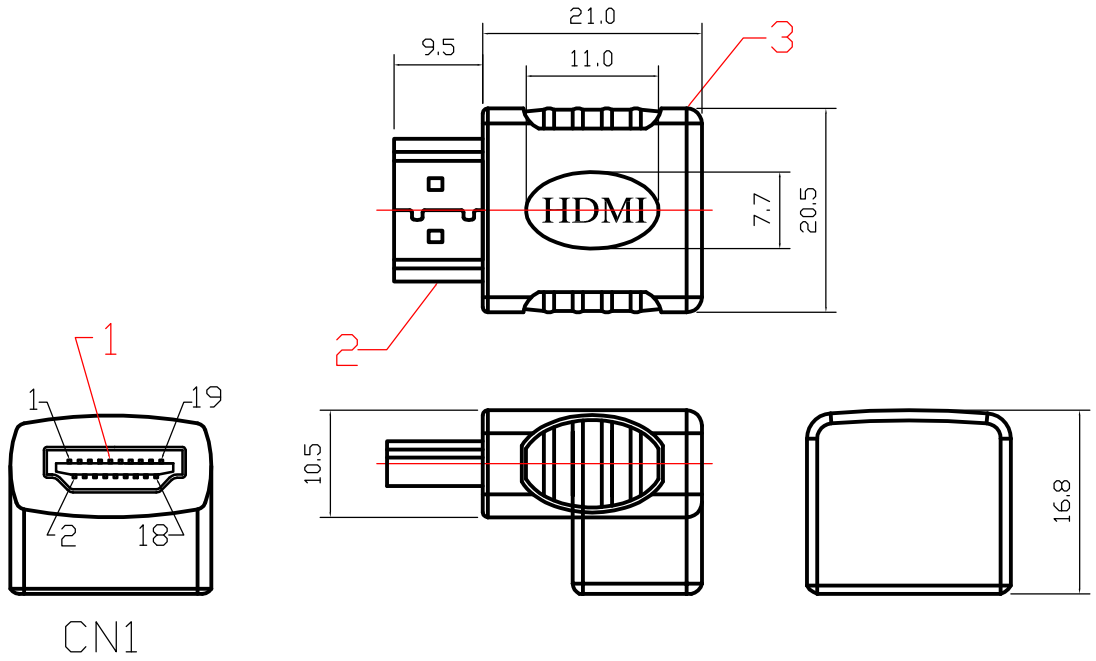

CN1

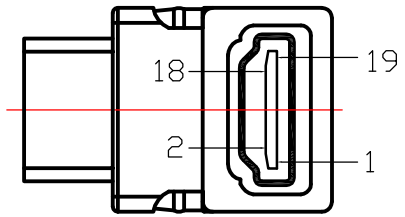

CN2

SPECIFCATION:

1. CONTACT CURRENT RATING:0.5A MIN.
2. CONTACT RESISTANCE:20mΩ MAX.
3. INSULTION RESISTANCE:10MΩ□MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
5. INSERTION FORCE:4. 50Kgf MAX.
6. EXTRACTION FORCE:1.0 ~ 4.0Kgf.
7. All the material must meet rohs standards

3	DIELECTRIC	PVC
2	TERMINAL FRAME	BRASS
1	PIN	BRASS
ITEM	DESIGNATION	MATERIAL

REV	PART NO.& SAMPLE NO.	DATE	BY
A	1523-1		
B			

TOLERANCE		SIGNATURES	DATE
0 ~ 10	±0.05	DRAFT: ZHOU XIN GUO	07-09-2012
10 ~ 99	±0.5		
100 ~ 999	±10.0		
1000 ~ 9999	±100.00	CHECKEO:	
10000 ~ 99999	±1000.00	APPROVAL:	

SHEET	SCALE	UNIT	REV
OF	1:1	mm	ø

大 廣 有 限 公 司
DA KOANG CO., LTD.

TITLE	RT. HDMI MALE TO HDMI FEMALE, GOLD
CUSTOMER	