



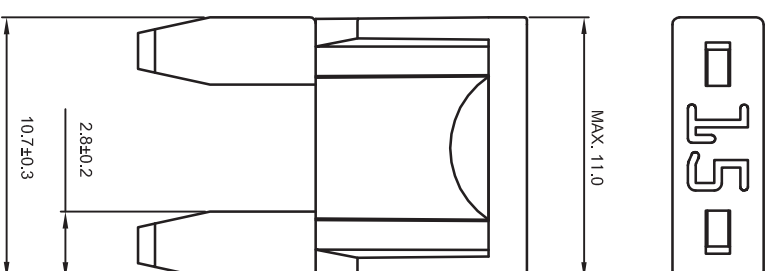

Rated Current	Body Color	Rated Voltage	Voltage Drop
2A	Gray	32V	225mV
3A	Violet		200mV
4A	Pink		175mV
5A	Tan		150mV
7.5A	Brown		140mV
10A	Red	125mV	120mV
15A	Blue		
20A	Yellow		
25A	Natural(white)		
30A	Green		

Electrical Characteristics

% of Rated Current	Operating Time
110%	>100 h
135%	0.75~1800 s
200%	0.15~5 s
350%	0.04~0.5 s
600%	0.02~0.2 s

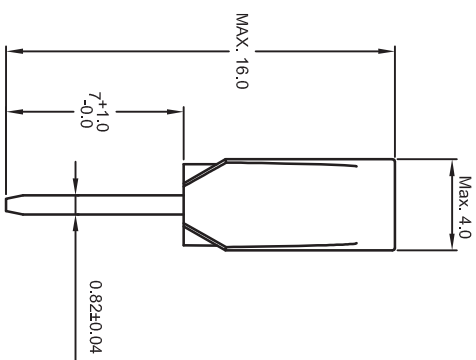

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM		CUSTOMER NO.	
TOLERANCE		DRAWN BY JANE	
DECIMALS X ± 0.5	ANGULAR ± 2°	CHECKED BY	TITLE
XX ± 0.25		APPROVED BY	大廣有限公司 DAKOANG CO., LTD.
DO NOT SCALE DRAWING		DATE	Blade Fuse
 		SCALE	
P/N	B	DATE	2009/06/29
REV		PART NO.	1321
		DRAWING NO.	BA04072801