

Rated Current	Body Color	Rated Voltage	Voltage Drop
2A	Gray	32V	225mV
3A	Violet		200mV
4A	Pink		175mV
5A	Tan		150mV
7.5A	Brown		140mV
10A	Red	125mV	
15A	Blue	120mV	
20A	Yellow		
25A	Natural(white)		
30A	Green		



According to ISO 8820 Standard Specifications Electrical Characteristics

% of Rated Current	Operating Time
110%	>100 h
135%	0.75 ~1800 s
200%	0.15~5 s
350%	0.04~0.5 s
600%	0.02~0.2 s

Company Logo



Part No.

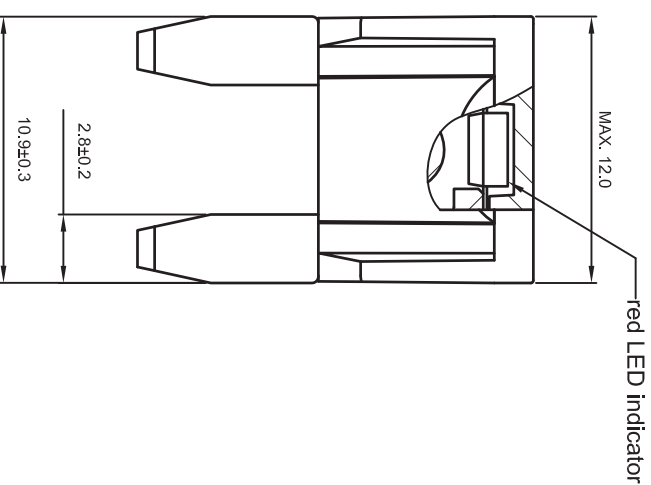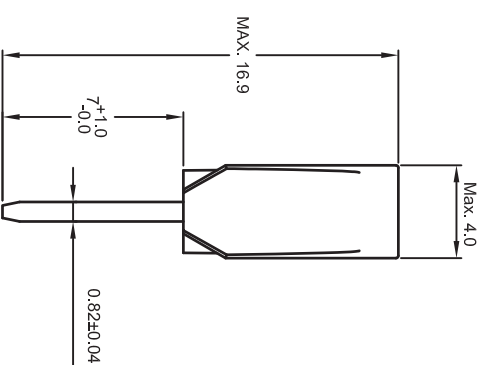

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM		CUSTOMER NO.		大廣有限公司 DA KOANG CO., LTD.	
TOLERANCE		DRAWN BY JANE		TITLE	
DECIMALS	ANGULAR	CHECKED BY		Blade Fuse with LED	
X ± 0.05	± 2°	APPROVED BY		PART NO. 1321A series	
XX ± 0.25		DATE 2010/03/09		DRAWING NO. BA10030904	
DO NOT SCALE DRAWING		SCALE			
		REV A			