
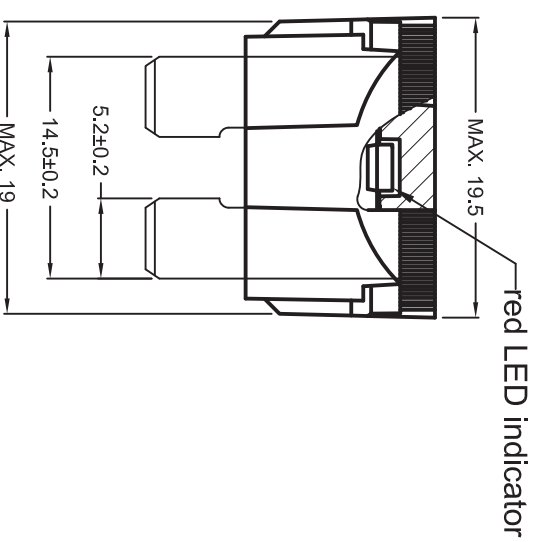


Rated Current (A)	Body Color	Rated Voltage	Voltage Drop
1	Black	32V	250mV
2	Gray		225mV
3	Violet		200mV
4	Pink		175mV
5	Tan		150mV
7.5	Brown		140mV
10	Red		125mV
15	Light Blue		
20	Yellow		
25	Natural (White)		
30	Green	120mV	
35	Purple		
40	Orange		

According to ISO 8820 Standard Specifications

Electrical Characteristics

% of Rated Current	Operating Time
110%	> 100 h
135%	0.75 ~1800 s
200%	0.15~5 s
350%	0.04~0.5 s
600%	0.02~0.2 s

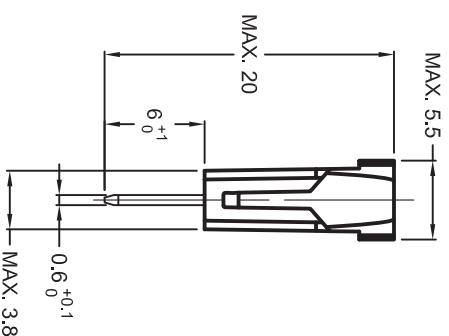

Company Logo Part No.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR X ± 0.05 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	大廣有限公司 DA KOANG CO., LTD. TITLE Blade Fuse with LED
		DRAWN BY JANE	
		CHECKED BY	PART NO. 2101A series DRAWING NO. BA10030903
		APPROVED BY	
P/N	REV	DATE	SCALE
	A	2010/03/09	