


Dimensions in mm

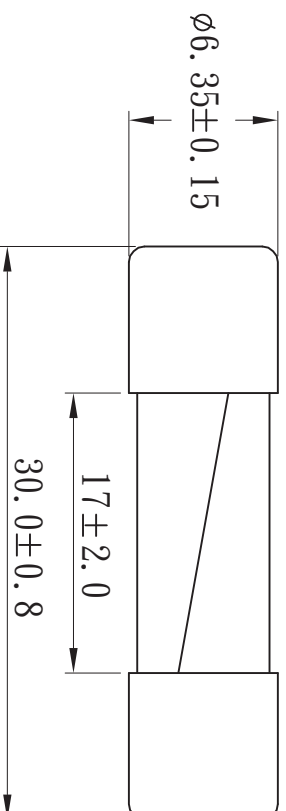

Rated Current	Breaking capacity	Rated Voltage
100mA	@125V/AC 100A @250V/AC 100A	125V/250V
125mA		125V/250V
160mA		125V/250V
200mA		125V/250V
250mA		125V/250V
300mA		125V/250V
315mA		125V/250V
400mA		125V/250V
500mA		125V/250V
600mA		125V/250V
630mA	@250V/AC 300A	125V/250V
700mA		125V/250V
800mA		125V/250V
1A		125V/250V
1.25A		125V/250V
1.5A		125V/250V
1.6A		125V/250V
2A		125V/250V
2.5A		125V/250V
3A		125V/250V
3.15A	@250V/AC 300A	125V/250V
3.5A		125V/250V
4A		125V/250V
5A		125V/250V
6A		125V/250V
6.3A		125V/250V
7A		125V/250V
8A		125V/250V
10A		125V/250V
12A		125V/250V
13A	@250V/AC 300A	125V/250V
15A		125V/250V
16A		250V
20A		250V
25A		250V
30A		250V

Rated Current	1.3 I _n	1.6 I _n	2 I _n
I _n	Min.	Max.	Max.
100mA-30A	90 min	60 min	2 min

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm		CUSTOMER NO.		大 廣 有 限 公 司 DA KOANG CO., LTD. TITLE 6. 35X30mm Fuse PART NO. 2086 DRAWING NO. AA10081706	
DECIMALS	TOLERANCE	DRAWN BY	Allan		
X ± 0.5	ANGULAR ± 2°	CHECKED BY			
XX ± 0.25	DO NOT SCALE DRAWING	APPROVED BY			
REV	C	DATE	2011.11.29	SCALE	