



Panel Cutout




Plastic Integrated Kunrnut

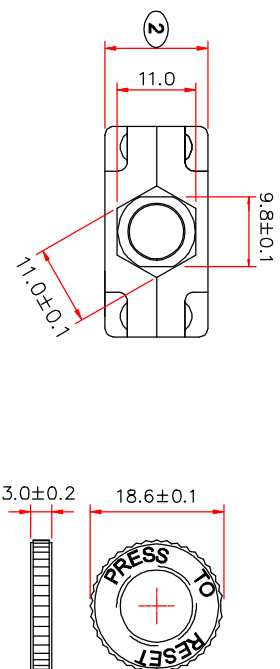


OVERLOAD	TRIP TIME
600%	0.34-1.05sec
500%	0.42-1.75sec
400%	0.62-3.05sec
300%	1.50-5.5sec
200%	5.2-30.0sec
150%	Trip in 1Hour
100%	Hold, No Trip

NO.	Dimensions
①	29.2±0.3
②	14.4±0.2
③	22.6±0.3
④	6.35±0.05
⑤	ø7.5±0.1
⑥	0.80±0.02


M11XP1.0 Plastic Bushing

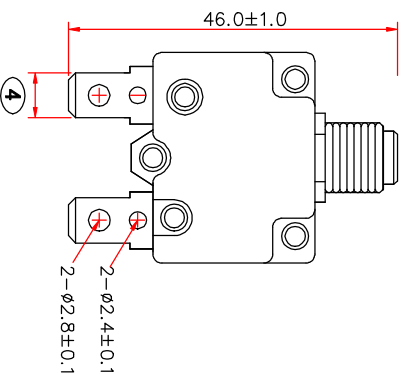

Push Button=Black

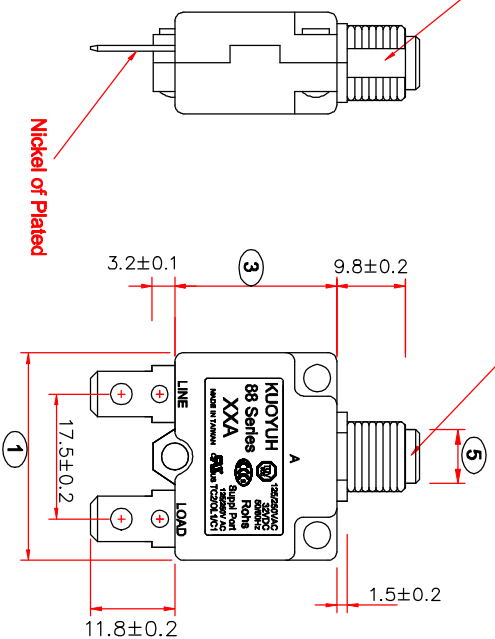

Nickel of Plated



備註:

1. XXA 表示額定電流, XXA 是 Rating Amp.

2. 安裝 Approve mark:

CUL 3A~30A 125/250V/AC

TUV 3.0A~20.0A 125/250V/AC

CCC 3.0A~20.0A 125/250V/AC

CSA 10A,15A 125V/AC

3. 過熱溫度: 溫度為26±5°C.

60W時每增加溫度, 溫度為35±5°C, 加熱時間為3秒內, 最多不可超過5秒.

When the stove processing temperature is 26±5°C, time is 3-5sec;

60W/venting iron processing, temp is 35±5°C, within 3 sec, can't over 5 sec.

4. 符合歐盟RoHS 指令 2002/95/EC 要求。(請參閱使用說明書)

The product accord with the requirement of ROHS(IEU 2002/95/EC)

Contacts use Exempted Item of RoHS Directive 2010/67/IEU 8(a)

5. (X) 表示公稱尺寸, The size of the need to check

NO	DESCRIPTION	APPROVED	DATE	TOLERANCE		APPROVED	CHECK	DESING	DRAWER	UNIT
				DIMENSION	TOLERANCE					
△				XX.XX	±0.05	總經理 2012.06.01 黃獻明	製造部 2012.06.01 林登松	品研部 2012.06.01 黃信凱	品研部 2012.06.01 張鈞輝	mm
△				XX.X	±0.1					SCALE 1:1
△				XX	±0.15					REV E/1
△				ANGLE X	TOLERANCE ±1°					DATE 2012.06.01
△	2012/10/01 UL+CUL 21-30A TC2/OL0/C1 Approved	APPROVED		XX	±0.5°	大廣有限公司 DA KOANG CO., LTD.	88 Series Thermal Circuit Breaker			TITLE DRAWING NO 5059

