
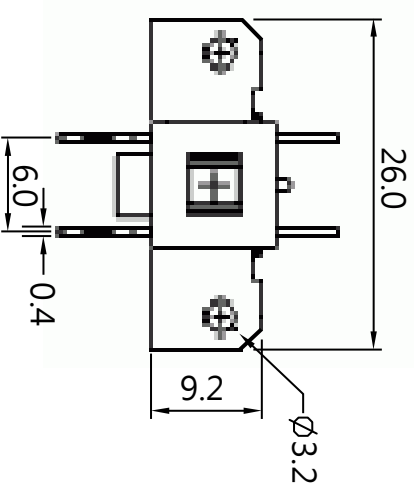


**General Specifications :**  
 Circuit : n/a  
 Rating : 250V AC 0.5A  
 Contact R.[max] :  $\leq 30\text{m}\Omega$  (initial)  
 Insulation R.[min] :  $\geq \text{D.C. } 500\text{V } 100\text{M}\Omega$  (initial)  
 Withstand VOL. : A.C. 500V 1minute (initial)  
 Life cycle[max] : 10,000 CYCLES

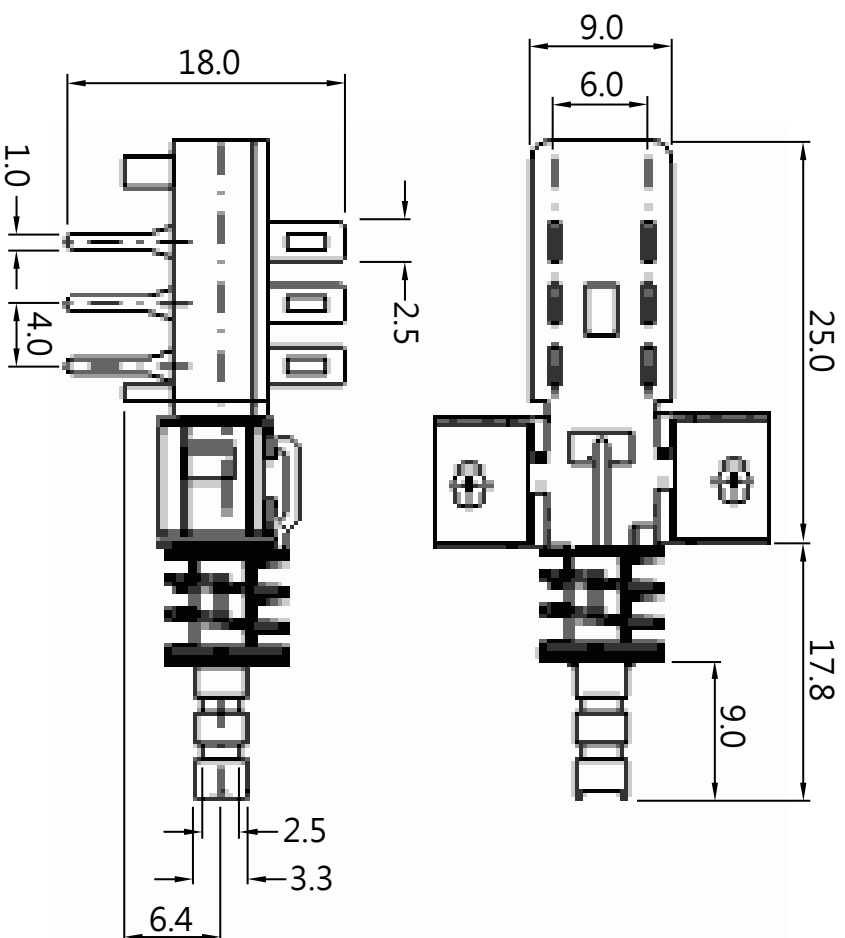

大 廣 有 限 公 司 DAKOANG CO., LTD.

DATE	DWN	CHKD	APVD	MANAGFR
12.26.2011				

PART NAME: 6P PUSH BUTTON SWITCH 2P2T ON-OFF PART NUMBER: 5043 VERSION:4.0

TOLERANCE :  $\pm 0.3\text{mm}$  UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: