大 廣 有 限 公 司 DA KOANG CO., LTD.

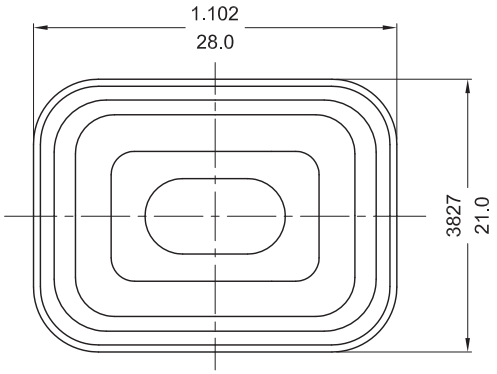



SPECIFICATION MODEL :"PS-5" SERIES

RATING:16A 125/250VAC (cURus)
16A(4) 250V~ T125/55(VDE/ENEC/CQC)
WITHSTAND VOLTAGE:1,000VAC 1 MINUTE
CONTACT RESISTANCE:20mΩ INITIAL (MAX),
INSULATION RESISTANCE:500VDC - 100MΩ (MIN).
△6 ILLUMINATION: 100~125VAC

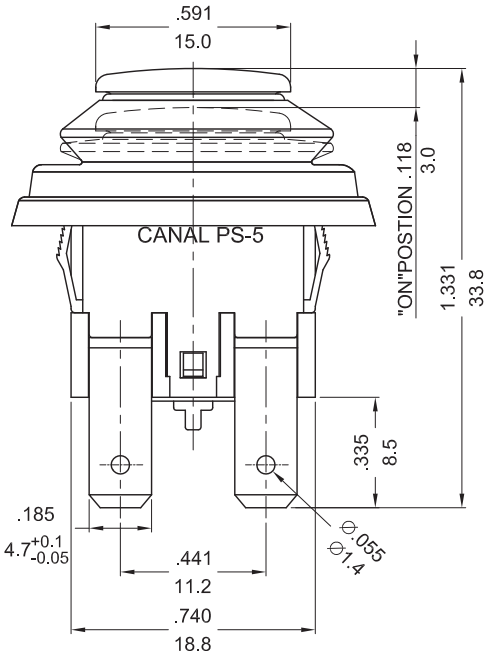

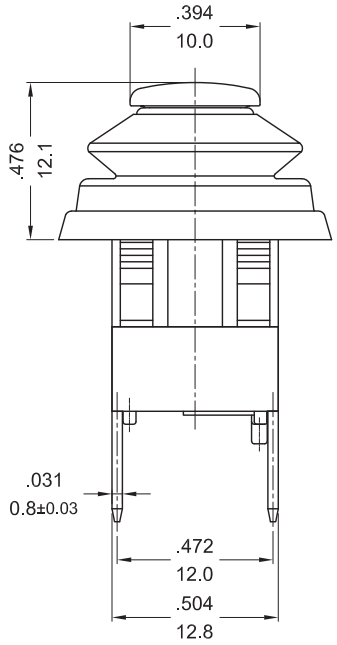



X=panel thickness	Dim.Y	Dim.z
0.75~1.25mm	19.2± 0 0.1 mm	12.9± 0 0.15 mm
1.25~2mm	19.4± 0 0.1 mm	12.9± 0 0.15 mm
2~3mm	19.8± 0 0.1 mm	12.9± 0 0.15 mm

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY
△7 2012.11.07	整理圖面，重新出圖。	趙超
△6 2012.09.10	增加電壓說明，重新出圖	向 宏
△5 2012.02.14	依最新出圖要求整理圖面，重新出圖	向 宏
△8 2013.02.25	依台北要求，用cURus取代UL/CUL。	趙超

TOLERANCES				ANGLE ½°	UNIT	mm	PART NAME	5226	DWG NO
DRAWN BY	劉義正	DESIGNED BY	劉義正	SCALE	5/3				S0746H
CHECKED BY		APPROVED BY		DATE	2009.10.26		PART NO	PS-5-210-PL**-SW	