



本公司智慧財產，未經同意不得複製
DAILYWELL. copyright, may not be used
without permission from DAILYWELL.

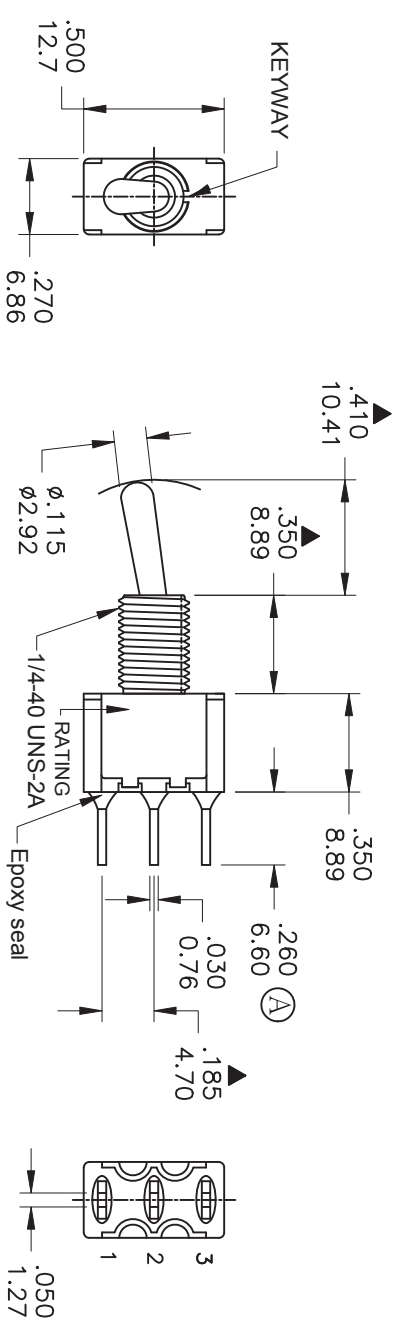

Model No.	POS. 1	POS. 2	POS. 3
1MS1	ON	NONE	ON
Term. Comm.	2-3		2-1
SCHEMATIC	2 Comm. 3	N/A	2 Comm. 3

SWITCH FUNCTION

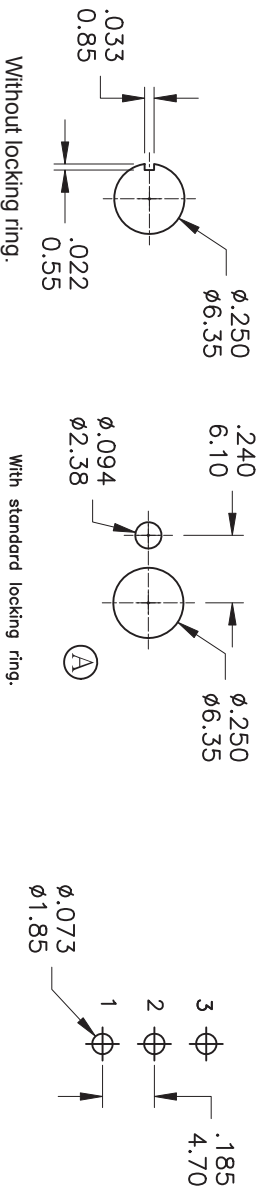

PART NO.	PART NAME	Q'TY
1 MNU-1M01A	1/4 INCH NUTS	2
2 MNU-1M02	LOCKING RING	1
3 MNU-1M03	LOCKING WASHER	1

FILE NAME:HARDWARE-0002

PANEL MOUNTING

P.C. MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10 mΩ max. initial @ 24VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000 MΩ min.
DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.
OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94V-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Copper alloy.
RoHS & Lead Free

符號	原尺寸	修改後尺寸	變更日期
1 (A)	.250,6.35	.260,6.60/MATERIALS	JUL - 23 - 2008
2 (B)		操作溫度-30C修訂為-40C	NOV-28-2017
3 (C)			
4 (D)			
5 (E)			

SCALE (比例) : 3 : 2

TOLERANCE (公差) :

0.00 mm ± 0.25mm
 0.0 mm ± 0.40mm
 ANGULAR : ± 5°

FILE NAME : 1MSP0799

CONTACT PLATING	TERMINAL PLATING	RATINGS
Q Silver	Q = Silver	5 Amps @ 120 VAC or 28VDC
C Gold over Silver	C = Gold over silver	2 Amps @250 VAC
R Gold	R = Gold	0.4 Volt-Amps (VA) max. @20V max. (AC or DC)

大廣有限公司 DA KOANG CO., LTD.

TITLE	Miniature Toggle Switches	SIZE
DWG NO.	5197B	圖紙 A4
REV. 圖號		UNIT 單位
REV. 版本	C	inch mm
CHECKED BY 審核	DATE 日期	SHEET 張數
	JUL - 23 - 2008	1 of 1
	DRAWN BY 製圖	IRENE