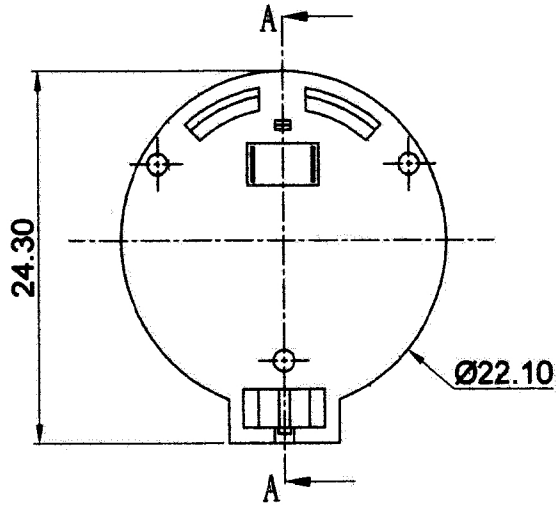

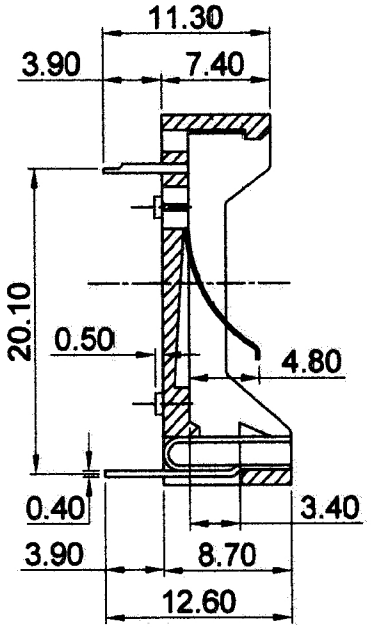

SECTION A-A

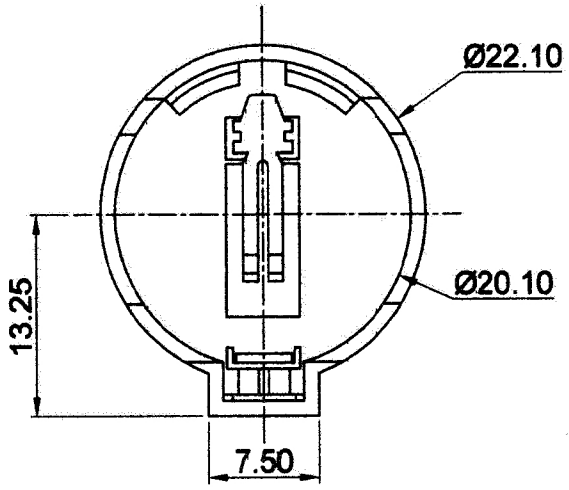

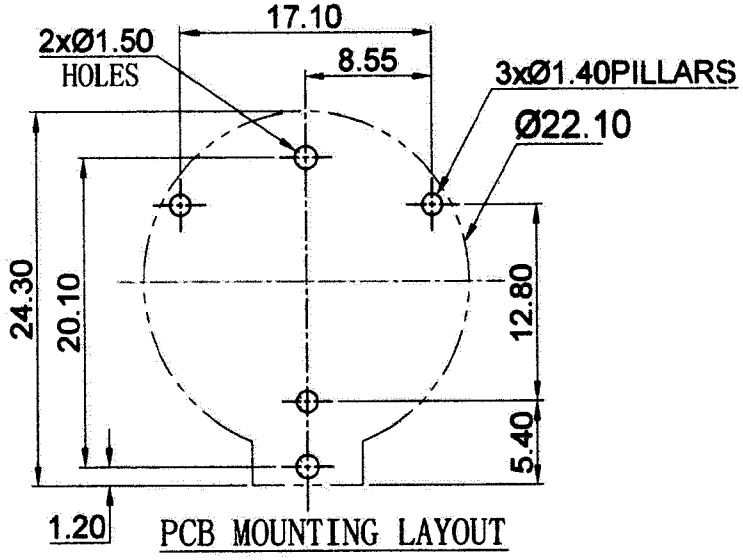

PCB MOUNTING LAYOUT

NOTES:

1. MATERIAL:
   HOUSING:PBT UL94V0 BLACK COLOR
   CONTACT:PHOSPHOR BRONZE 0.2 THK
   TIN PLATED OVER NICKEL
2. CURRENT RATING : 3A (AC/DC)
3. VOLTAGE RATING : 500V (AC/DC)
4. CONTACT RESISTANCE: 30 MILLIOHMS
5. INSULATION RESISTANCE: 1000 MEGAOHMS
6. TEMPERATURE RANGE: -55°C TO +105°C
7. HUMIDITY: 40°C AND 90-95% RH FOR 96 HOURS
8. RoHS COMPLIANT

NO.	MODIFICATION	DATE
3		
2		
1		

General Tolerance
Dim:0.0 ±0.30
0.00 ±0.20
Angle:±3° 0.000 ±0.10

大廣有限公司 DA KOANG CO., LTD.

NAME	COIN CELL HOLDER: 3416		
SCALE	2:1	APPD	
UNIT	MM	CHKD	
MAT'L	AS NOTES	DWN	HUHONGWEI
DATE	APR. 10. 2008	DR NO	CH224-0408